



2/2 way Solenoid Control Valve

- Direct-acting, normally closed
- DN3 to 12 mm
- Port Connection 1/2" or 3/4"

Type 2836 can be combined with...



Type 8605

Control electronics
Cable plug version



Type 8605

Digital control electronics
DIN-rail version




Type 2508

Cable plug

The direct-acting solenoid control valve, Type 2836, works as an electromagnetically actuated control valve in applications with relatively high flow rates. The valve is normally closed.

Valve operation A



2/2 way direct-acting,
solenoid proportional
control valve

Valve control takes place through the control electronics of Type 8605, which converts an analogue input signal into a PWM²⁾ (pulse-width modulation) signal.

Further, functional features of the Type 8605 electronic control unit:

- Temperature compensation for coil heating by internal current regulation
- Simple zero and span settings
- Ramp function to dampen fast status changes

¹⁾ Pressure data [bar]: Overpressure with respect to atmospheric pressure

²⁾ PWM pulse-width modulation

³⁾ Characteristic data of control behaviour depends on process conditions

Technical data - valve	
Body material	Brass, stainless steel
Seal material	FKM, others on request
Fluids	Neutral gases and liquids
Pressure range	0 to 25 bar ¹⁾
Fluid temperature	- 10 to + 90 °C (14 °F to 194 °F)
Ambient temperature	max. + 55 °C (max. 131 °F)
Viscosity	max. 21 mm ² /s (max. 21 cSt)
Power supply	24 V DC
PWM frequency	150 - 180 Hz
Power consumption	max. 24 W
Max. coil current	1100 mA
Duty cycle	100% continuously rated
Port connection	G 1/2, G 3/4, NPT 1/2, NPT 3/4, others on request
Electrical connection	Cable plug Type 2508 acc. to DIN EN 175301-803 form A
Installation	As required, preferably with actuator in upright position
Typical control data³⁾	
Hysteresis	< 5 %
Repeatability	< 1 % of F.S.
Sensitivity	< 0.5 % of F.S.
Span	1:25
Protection class - valve	IP65

По вопросам продаж и поддержки обращайтесь:

Архангельск +7 (8182) 45-71-35
Астрахань +7 (8512) 99-46-80
Барнаул +7 (3852) 37-96-76
Белгород +7 (4722) 20-58-80
Брянск +7 (4832) 32-17-25
Владивосток +7 (4232) 49-26-85
Волгоград +7 (8442) 45-94-42
Екатеринбург +7 (343) 302-14-75
Ижевск +7 (3412) 20-90-75
Казань +7 (843) 207-19-05
Калуга +7 (4842) 33-35-03


Кемерово +7 (3842) 21-56-70
Киров +7 (8332) 20-58-70
Краснодар +7 (861) 238-86-59
Красноярск +7 (391) 989-82-67
Курск +7 (4712) 23-80-45
Липецк +7 (4742) 20-01-75
Магнитогорск +7 (3519) 51-02-81
Москва +7 (499) 404-24-72
Мурманск +7 (8152) 65-52-70
Наб.Челны +7 (8552) 91-01-32
Ниж.Новгород +7 (831) 200-34-65

Новосибирск +7 (383) 235-95-48
Омск +7 (381) 299-16-70
Орел +7 (4862) 22-23-86
Оренбург +7 (3532) 48-64-35
Пенза +7 (8412) 23-52-98
Пермь +7 (342) 233-81-65
Ростов-на-Дону +7 (863) 309-14-65
Рязань +7 (4912) 77-61-95
Самара +7 (846) 219-28-25
Санкт-Петербург +7 (812) 660-57-09
Саратов +7 (845) 239-86-35

Сочи +7 (862) 279-22-65
Ставрополь +7 (8652) 57-76-63
Сургут +7 (3462) 77-96-35
Тверь +7 (4822) 39-50-56
Томск +7 (3822) 48-95-05
Тула +7 (4872) 44-05-30
Тюмень +7 (3452) 56-94-75
Ульяновск +7 (8422) 42-51-95
Уфа +7 (347) 258-82-65
Хабаровск +7 (421) 292-95-69
Челябинск +7 (351) 277-89-65
Ярославль +7 (4852) 67-02-35


**сайт: burkert.pro-solution.ru | эл. почта: btk@pro-solution.ru
телефон: 8 800 511 88 70**

Dimensions [mm]

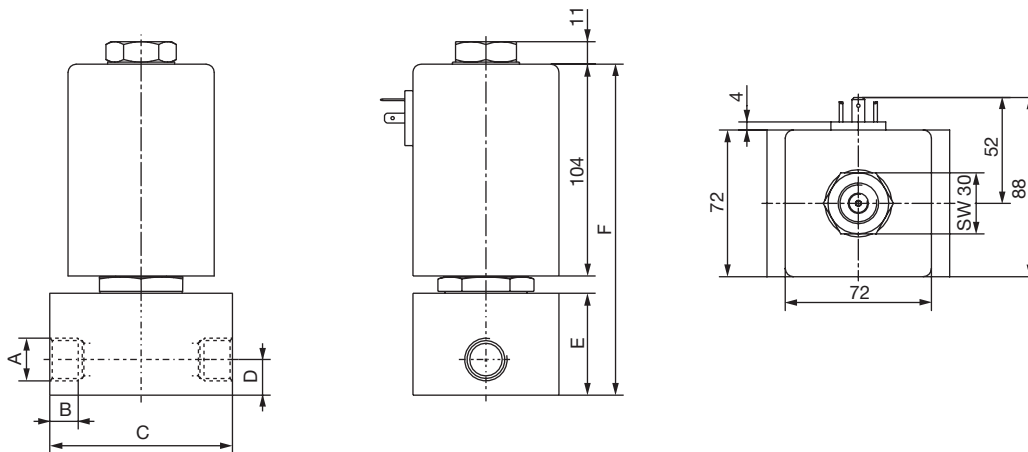

Line connection A	B	C	D	E	F	Mass [g]
G 1/2; NPT 1/2	14	90	17.5	50	162.5	4000 (brass)
G 3/4; NPT 3/4	16	90	17.5	50	162.5	4600 (stainless steel)

Characteristics of a proportional valve

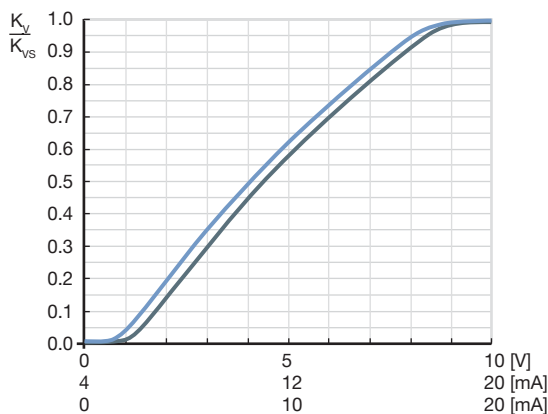

Advice for valve sizing

In continuous flow applications, the choice of an appropriate valve size is much more important than with on/off valves. The optimum size should be selected such that the resulting flow in the system is not unnecessarily reduced by the valve. However, a sufficient part of the pressure drop should be taken across the valve even when it is fully opened.

Recommended value: $\Delta p_{\text{valve}} > 25\%$ of total pressure drop within the system

Otherwise, the ideal, linear valve curve characteristic is changed.

If the differential pressure (difference between inlet and outlet pressure) exceeds half the value of the nominal pressure, the characteristics may change.

For that reason take advantage of Bürkert competent engineering services during the planning phase!

Determination of the k_v value

Pressure drop	k_v value for liquids [m³/h]	k_v value for gases [m³/h]
Subcritical $p_2 > \frac{p_1}{2}$	$= Q \sqrt{\frac{\rho}{1000 \Delta p}}$	$= \frac{Q_N}{514} \sqrt{\frac{T_1 \rho_N}{p_2 \rho}}$
Supercritical $p_2 < \frac{p_1}{2}$	$= Q \sqrt{\frac{\rho}{1000 \Delta p}}$	$= \frac{Q_N}{257 p_1} \sqrt{T_1 \rho_N}$

k_v Flow coefficient [m³/h] ⁴⁾ Q_N
 Standard flow rate [m³/h] ⁵⁾ p_1
 Inlet pressure [bar] ⁶⁾ p_2
 Outlet pressure [bar] ⁶⁾
 Δp Differential pressure $p_1 - p_2$ [bar] ρ
 Density [kg/m³]
 ρ_N Standard density [kg/m³]
 T_1 Temperature of fluid [(273+t)K]
 medium


⁴⁾ Measured with water, $\Delta p = 1$ bar, differential pressure over the valve

⁵⁾ Standard conditions at 1.013 bar³⁾ and 0 °C (273K)

⁶⁾ Absolute pressure

Characteristic values with ordering chart (other versions on request)

All valves with FKM seal

Valve operation	Orifice [mm]	Port connection	k_v value water [m³/h]	Q_N value [l/min]	Maximum operating pressure [bar]	Article no. brass body	Article no. stainless
	3	G ½	0.25	270	25	154541 	154542 
		NPT ½	0.25	270	25	164592 	-
	4	G ½	0.40	430	16	154543 	154544 
		NPT ½	0.40	430	16	164593 	-
	6	G ½	0.90	970	8	145654 	154545 
		NPT ½	0.90	970	8	164594 	-
		G ¾	0.90	970	8	154546 	154547 
		NPT ¾	0.90	970	8	164595 	-
	8	G ½	1.5	1615	5	154548 	154549 
		NPT ½	1.5	1615	5	164596 	-
		G ¾	1.5	1615	5	154550 	154551 
		NPT ¾	1.5	1615	5	164597 	-
	10	G ¾	2.0	2150	3	154552 	154553 
		NPT ¾	2.0	2150	3	164598 	-
	12	G ¾	2.5	2700	2	154554 	154555 
		NPT ¾	2.5	2700	2	164599 	-

⁷⁾ k_{VS} value: Flow rate value for water, measured at +20 °C and 1 bar pressure differential over a fully opened valve.

⁸⁾ Q_N value: Flow rate value for air with inlet pressure of 6 bar¹⁾, 1 bar pressure differential and +20 °C.

⁹⁾ Pressure data [bar]: Overpressure with respect to atmospheric pressure

Please note that the valves are delivered without control electronics unit and cable plug (see accessories)

Ordering chart for accessories

Cable plug Type 2508 according to DIN EN 175301-803 Form A

The delivery of a cable plug includes the flat seal and fixing screw

Circuitry	Voltage / frequency	Article no.
None	0 - 250 V AC/DC	008376 
None, with 3 m cable	0 - 250 V AC/DC	783573 

Control Electronics, Type 8605 - please see datasheet

For product inquiries, use the specification sheet for solenoid control valves!

Design data for solenoid control valves

► Please fill out this form and send to your local Bürkert Sales Centre* with your inquiry or order

Company	Contact person
Customer no.	Dept.
Address	Tel./Fax
Town / Postcode	E-Mail

☐ = Mandatory fields	Quantity	Requested delivery date
Process data		
☐ Fluid		
☐ State of fluid	☐ liquid	☐ gaseous
☐ Fluid temperature	°C	☐
☐ Maximum flow rate	= Q_{nom}	Unit:
☐ Minimum flow rate	Q_{min} =	Unit:
☐ Inlet pressure at nominal operation	p_1 =	barg
☐ Outlet pressure at nominal operation	p_2 =	barg
☐ Maximum inlet pressure	p_{1max} =	barg
☐ Ambient temperature	°C	
Additional specifications		
☐ Body material	☐ Brass	☐ Stainless steel
☐ Seal material	☐ FKM	☐ other

Note Please state all pressure values as **overpressures with** respect to atmospheric [barg].

По вопросам продаж и поддержки обращайтесь:

Архангельск +7 (8182) 45-71-35
Астрахань +7 (8512) 99-46-80
Барнаул +7 (3852) 37-96-76
Белгород +7 (4722) 20-58-80
Брянск +7 (4832) 32-17-25
Владивосток +7 (4232) 49-26-85
Волгоград +7 (8442) 45-94-42
Екатеринбург +7 (343) 302-14-75
Ижевск +7 (3412) 20-90-75
Казань +7 (843) 207-19-05
Калуга +7 (4842) 33-35-03

Кемерово +7 (3842) 21-56-70
Киров +7 (8332) 20-58-70
Краснодар +7 (861) 238-86-59
Красноярск +7 (391) 989-82-67
Курск +7 (4712) 23-80-45
Липецк +7 (4742) 20-01-75
Магнитогорск +7 (3519) 51-02-81
Москва +7 (499) 404-24-72
Мурманск +7 (8152) 65-52-70
Наб.Челны +7 (8552) 91-01-32
Ниж.Новгород +7 (831) 200-34-65

Новосибирск +7 (383) 235-95-48
Омск +7 (381) 299-16-70
Орел +7 (4862) 22-23-86
Оренбург +7 (3532) 48-64-35
Пенза +7 (8412) 23-52-98
Пермь +7 (342) 233-81-65
Ростов-на-Дону +7 (863) 309-14-65
Рязань +7 (4912) 77-61-95
Самара +7 (846) 219-28-25
Санкт-Петербург +7 (812) 660-57-09
Саратов +7 (845) 239-86-35

Сочи +7 (862) 279-22-65
Ставрополь +7 (8652) 57-76-63
Сургут +7 (3462) 77-96-35
Тверь +7 (4822) 39-50-56
Томск +7 (3822) 48-95-05
Тула +7 (4872) 44-05-30
Тюмень +7 (3452) 56-94-75
Ульяновск +7 (8422) 42-51-95
Уфа +7 (347) 258-82-65
Хабаровск +7 (421) 292-95-69
Челябинск +7 (351) 277-89-65
Ярославль +7 (4852) 67-02-35

сайт: burkert.pro-solution.ru | эл. почта: btb@pro-solution.ru
телефон: 8 800 511 88 70