



## 2/2-Way Motor Valve

- Seat valve with stepper motor - actuator isolated from flow path
- Low power consumption
- Fast response
- Orifice sizes 2 to 6 mm
- Port connection 1/4" and 3/8"


### Type 8611

Compact PI Controller

Type 3270 is a direct-acting and general purpose motor valve for shut-off, used as regulating unit in control loops. A linear stepper motor as actuator drives the valve, which comes in a compact and robust housing. Analogue input signals are processed by the integrated control electronics. Due to an elastomeric seat seal the valve closes tight up to the DN specific nominal pressure (see ordering chart on p. 4). In case of power failure, the actual valve position will be kept. The motor's power consumption in opened or closed position is nearly zero. Only during valve switching does the motor need power. This key feature can reduce the energy consumption of a plant dramatically and thus make it more efficient.

### Circuit function

2-way valve, motor driven, remains in position without further electrical power



Technical data	
<b>Materials</b>	
<b>Body</b>	Brass or stainless steel
<b>Housing</b>	PC (Polycarbonate), PPS (Polyphenylene sulfide)
<b>Seals</b>	FKM or NBR, others on request
<b>Medium</b>	Neutral gases, liquids
<b>Pressure Range <sup>1)</sup></b>	0 to 6 bar
<b>Closure time</b>	2.5 s (0 to 100% stroke)
<b>Fluid temperature</b>	0 to +70 °C
<b>Ambient temperature</b>	-10 to +60 °C
<b>Viscosity</b>	Max. 600 mm <sup>2</sup> /s (cSt)
<b>Power supply</b>	24 V DC ± 10% (max. residual ripple 10%)
<b>Power consumption</b>	Max. 8 W (depending on motor control), <1 W in holding position
<b>Duty cycle</b>	Up to 100 % (depending on fluid and ambient temperature)
<b>Port connection</b>	G 1/4, G 3/8, NPT 1/4, NPT 3/8
<b>Electrical connection</b>	M12 connector, 8-pin, male
<b>Input signal</b>	Binary signal, PNP, 0-5V (log. 0, valve closed) or 10-30V (log. 1, valve open)
<b>Output signal</b>	Load capacity 10-30V, PNP, max. 100mA (Output signal active, if valve is closed)
<b>Protection class - valve</b>	IP 50
<b>Installation</b>	As required, preferably with actuator upright
<b>Status of LED</b>	White: Normal operation and powered, Yellow: Valve opened, Green: Valve closed, Red: Failure
<b>Dimensions</b>	See drawings on page 4
<b>Weight</b>	~0.7 kg

<sup>1)</sup> Pressure data [bar]: Overpressure with respect to atmospheric pressure

## **По вопросам продаж и поддержки обращайтесь:**


Архангельск +7 (8182) 45-71-35	Калининград +7 (4012) 72-21-36	Новороссийск +7 (8617) 30-82-64	Сочи +7 (862) 279-22-65
Астана +7 (7172) 69-68-15	Калуга +7 (4842) 33-35-03	Новосибирск +7 (383) 235-95-48	Ставрополь +7 (8652) 57-76-63
Астрахань +7 (8512) 99-46-80	Кемерово +7 (3842) 21-56-70	Омск +7 (381) 299-16-70	Сургут +7 (3462) 77-96-35
Барнаул +7 (3852) 37-96-76	Киров +7 (8332) 20-58-70	Орел +7 (4862) 22-23-86	Сызрань +7 (8464) 33-50-64
Белгород +7 (4722) 20-58-80	Краснодар +7 (861) 238-86-59	Оренбург +7 (3532) 48-64-35	Сыктывкар +7 (8212) 28-83-02
Брянск +7 (4832) 32-17-25	Красноярск +7 (391) 989-82-67	Пенза +7 (8412) 23-52-98	Тверь +7 (4822) 39-50-56
Владивосток +7 (4232) 49-26-85	Курск +7 (4712) 23-80-45	Первоуральск +7 (3439) 26-01-18	Томск +7 (3822) 48-95-05
Владимир +7 (4922) 49-51-33	Липецк +7 (4742) 20-01-75	Пермь +7 (342) 233-81-65	Тула +7 (4872) 44-05-30
Волгоград +7 (8442) 45-94-42	Магнитогорск +7 (3519) 51-02-81	Ростов-на-Дону +7 (863) 309-14-65	Тюмень +7 (3452) 56-94-75
Воронеж +7 (4732) 12-26-70	Москва +7 (499) 404-24-72	Рязань +7 (4912) 77-61-95	Ульяновск +7 (8422) 42-51-95
Екатеринбург +7 (343) 302-14-75	Мурманск +7 (8152) 65-52-70	Самара +7 (846) 219-28-25	Уфа +7 (347) 258-82-65
Иваново +7 (4932) 70-02-95	Наб.Челны +7 (8552) 91-01-32	Санкт-Петербург +7 (812) 660-57-09	Хабаровск +7 (421) 292-95-69
Ижевск +7 (3412) 20-90-75	Ниж.Новгород +7 (831) 200-34-65	Саранск +7 (8342) 22-95-16	Чебоксары +7 (8352) 28-50-89
Иркутск +7 (3952) 56-24-09	Нижневартовск +7 (3466) 48-22-23	Саратов +7 (845) 239-86-35	Челябинск +7 (351) 277-89-65
Йошкар-Ола +7 (8362) 38-66-61	Нижнекамск +7 (8555) 24-47-85	Смоленск +7 (4812) 51-55-32	Череповец +7 (8202) 49-07-18
Казань +7 (843) 207-19-05			Ярославль +7 (4852) 67-02-35

**сайт: [burkert.pro-solution.ru](http://burkert.pro-solution.ru) | эл. почта: [btk@pro-solution.ru](mailto:btk@pro-solution.ru)  
телефон: 8 800 511 88 70**


## Duty Cycle Derating Curve

For motor valves it is essential to know the duty cycle during operation. Self-heating of the motor limits the maximum duty cycle. High ambient temperatures amplify the risk of damage due to overheating. The diagram below shows the suggested duty cycles dependent on the ambient temperature. Running the motor valve in the power saving mode (lower actuator force) allows higher duty cycles. The motor is optimized for the valve function regarding dimensions, power consumption and costs.

**Note:** Operating the valve beyond the suggested duty cycles leads to a drastically reduced lifetime of the valve.



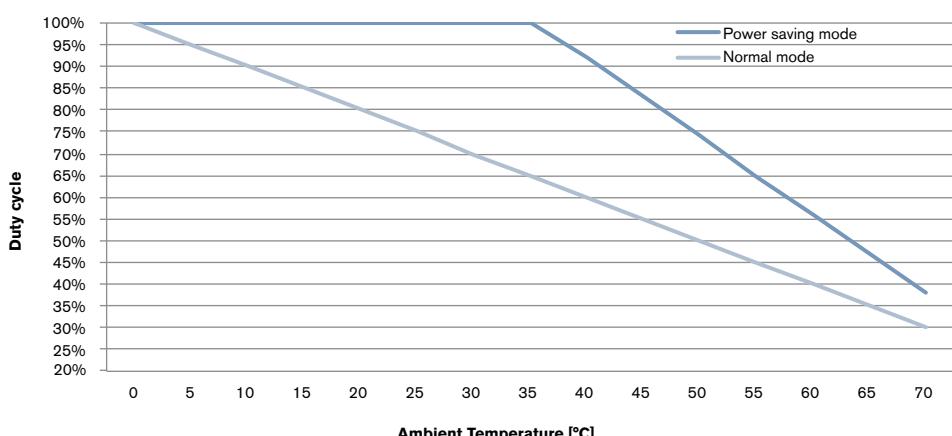


## Materials

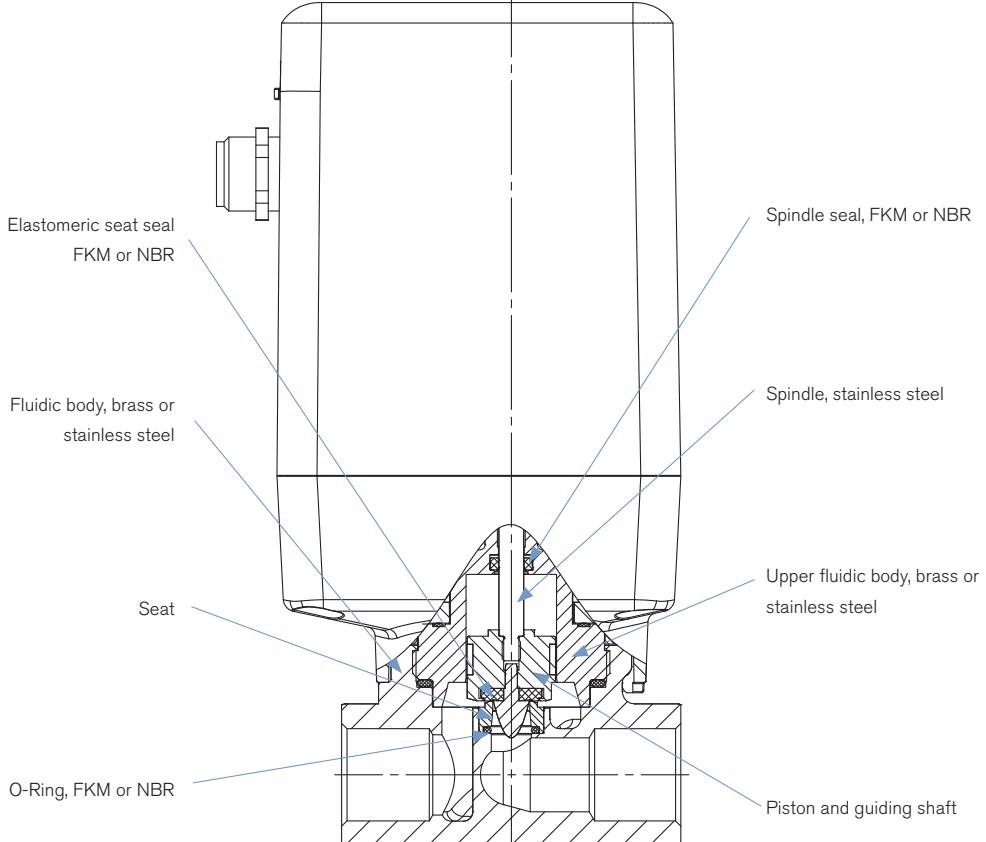



## Dimensions [mm]

## **Standard version**

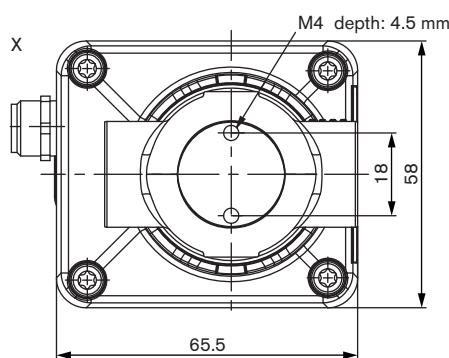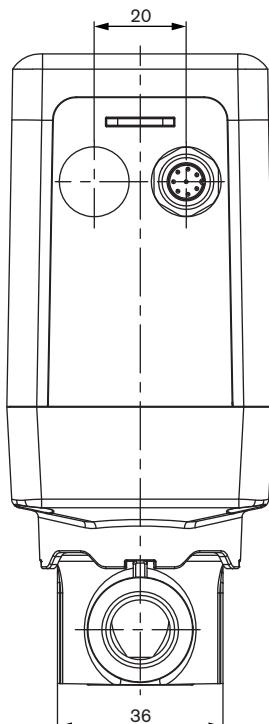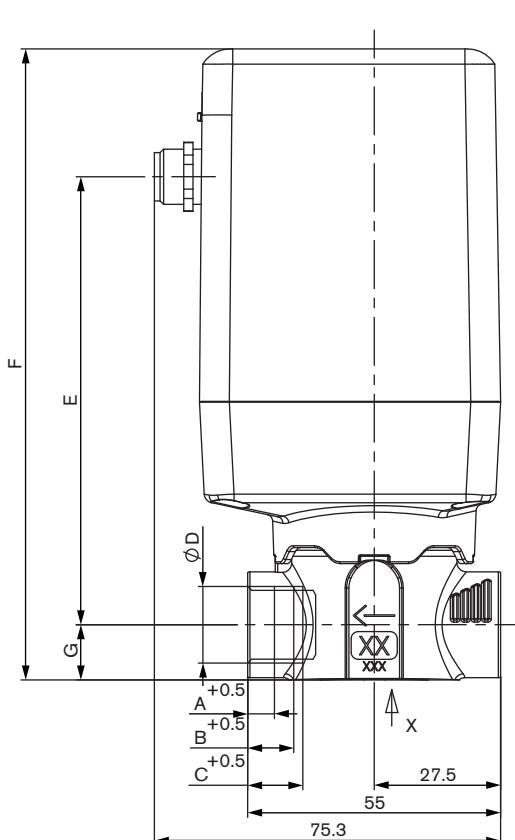

A	B	C	D	E	F	G
		12	G 3/8	97.4	137.2	12
6	10.3		NPT 3/8	97.4	137.2	12
		12	G 1/4	96.4	134.2	10
5.8	10		NPT 1/4	96.4	134.2	10

## Pin Assignment

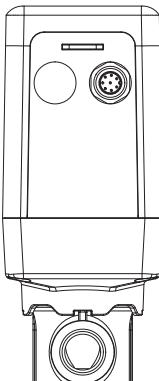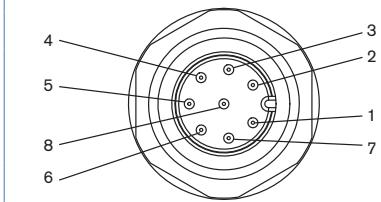	<b>Circular connector M12 - 8-pin</b>	<b>Pin</b>	<b>Assignment</b>
		1	24V DC
		2	GND
		3	Not connected
		4	Not connected
		5	Not connected
		6	Valve actuating +
		7	Binary output
		8	Valve actuating GND

## Ordering Chart

<b>Valve function</b>	<b>Orifice [mm]</b>	<b>Port Connection</b>	<b>Seal material</b>	<b><math>K_{vs}</math> value water [<math>m^3/h</math>]<sup>2)</sup></b>	<b>Nominal pressure [barg]<sup>3)</sup></b>	<b>Item no. brass</b>	<b>Item no. stainless steel</b>
Shut-off valve, without safety position in case of power failure	2	G 1/4	FKM	0.15	6	268 576	268 584
			NBR	0.15	6	268 580	268 588
		NPT 1/4	FKM	0.15	6	268 592	268 600
			NBR	0.15	6	268 596	268 604
	3	G 1/4	FKM	0.3	6	268 577	268 585
			NBR	0.3	6	268 581	268 589
		NPT 1/4	FKM	0.3	6	268 593	268 601
			NBR	0.3	6	268 597	268 605
	4	G 3/8	FKM	0.5	6	268 578	268 586
			NBR	0.5	6	268 582	268 590
		NPT 3/8	FKM	0.5	6	268 594	268 602
			NBR	0.5	6	268 598	268 606
	6	G 3/8	FKM	0.9	6	268 579	268 587
			NBR	0.9	6	268 583	268 591
		NPT 3/8	FKM	0.9	6	268 595	268 603
			NBR	0.9	6	268 599	268 607

<sup>2)</sup> Measured with water (20°C) and 1 bar pressure drop over valve

<sup>3)</sup> Fuel gases may differ

## Ordering Chart for Accessories

<b>Article</b>	<b>Item No.</b>
M12 connector with 2m cable, 8 pins	919 061
M12 connector with 2m cable, 8 pins (shielded cable)	918 991

To find your nearest Bürkert facility, click on the orange box → 

## 2/2-Way Motor Valve



**Type 8611**

Compact PI Controller

Type 3275 is a direct-acting and general purpose motor valve for shut-off, used as regulating unit in control loops. The valve is powered by a stepper motor, which is incorporated in the compact and robust housing. Analogue input signals are processed by the integrated control electronics. The drive shaft shifts a very smooth ceramic disc over a second fixed ceramic disc. The fixed ceramic disc is simultaneously the valve seat. By turning the ceramic disc the valve opens. The seat tightness is optimized by high quality surfaces of the stacked ceramic discs (but still not comparable with seat valves). In case of power failure the actual valve position will be kept. Therefore, this valve is not suitable as safety shut-off valve. The motor's power consumption in opened or closed position is nearly zero. Only during valve switching does the motor need power. This key feature can reduce the energy consumption of a plant dramatically and thus make it more efficient.

**Circuit function**

2-way valve, motor driven, remains in position without further electrical power



- Disc valve with stepper motor - Actuator isolated from flow path
- Low power consumption
- Fast response times
- Orifice sizes 8 ... 25 mm
- Port connection 1/2", 3/4" and 1"

**Technical data**


<b>Materials</b>	Brass or stainless steel PC (Polycarbonate), PPS (Polyphenylene sulfide) FKM or NBR, others on request Technical ceramics
<b>Body</b>	Neutral gases, liquids
<b>Housing</b>	Shut-off class IV
<b>Seals</b>	
<b>Seat sealing</b>	
<b>Medium</b>	
<b>Seat leakage based on IEC / EN 60534-4</b>	
<b>Pressure Range <sup>1)</sup></b>	0...6 bar
<b>Closure time</b>	Ca. 4 sec
<b>Medium temperature</b>	0...+70 °C
<b>Ambient temperature</b>	-10 ... +60 °C
<b>Power supply</b>	24 V DC ± 10% (max. residual ripple 10%)
<b>Power consumption</b>	Max. 12 W (depending on motor control) Ca. 1 W in holding position
<b>Duty cycle</b>	Up to 100 % (depending on fluid and ambient temperature)
<b>Port connection</b>	G 1/2, G 3/4, G 1, NPT 1/2, NPT 3/4, NPT 1
<b>Electrical connection</b>	M12 connector, 8-pin, male
<b>Input signal</b>	Binary signal, PNP, 0-5V (log. 0, valve close) or 10-30V (log. 1, valve open)
<b>Output signal</b>	Load capacity 10...30V, PNP, max. 100mA (Output signal active, if valve is closed)
<b>Protection class - valve</b>	IP 50
<b>Installation</b>	As required, preferably with actuator upright
<b>Status of LED</b>	White: Normal operation and powered, Yellow: Valve opened, Green: Valve closed, Red: Failure
<b>Dimensions</b>	See drawings
<b>Weight</b>	~ 800g (DN8) ... 1500g (DN25)

<sup>1)</sup> Pressure data [bar]: Overpressure with respect to atmospheric pressure


## Duty Cycle Derating Curve

For motor valves it is essential to know the duty cycle during operation. Self-heating of the motor limits the maximum duty cycle. High ambient temperatures amplify the risk of damage due to overheating. The diagram below shows the suggested duty cycles dependent on the ambient temperature. Running the motor control valve in the power saving mode (lower actuator force) allows higher duty cycles. The motor is optimized for the valve function regarding dimensions, power consumption and costs.

**Note:** Operating the valve beyond the suggested duty cycles leads to a drastically reduced lifetime of the valve.

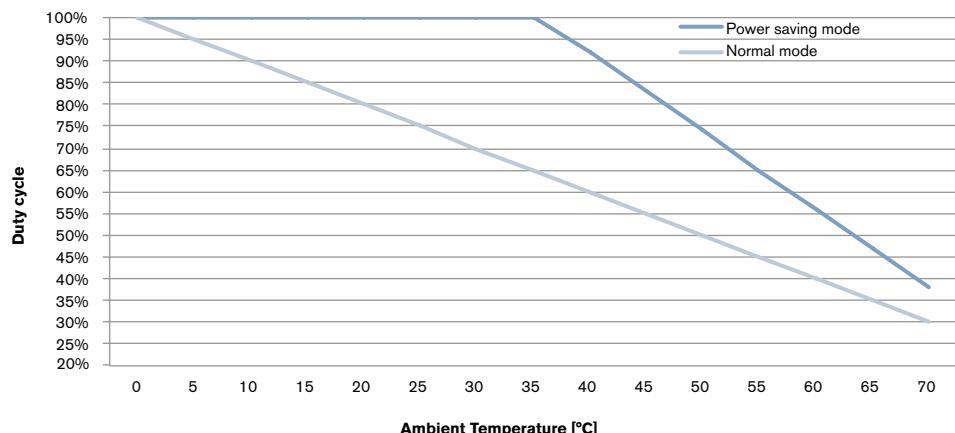


## Materials

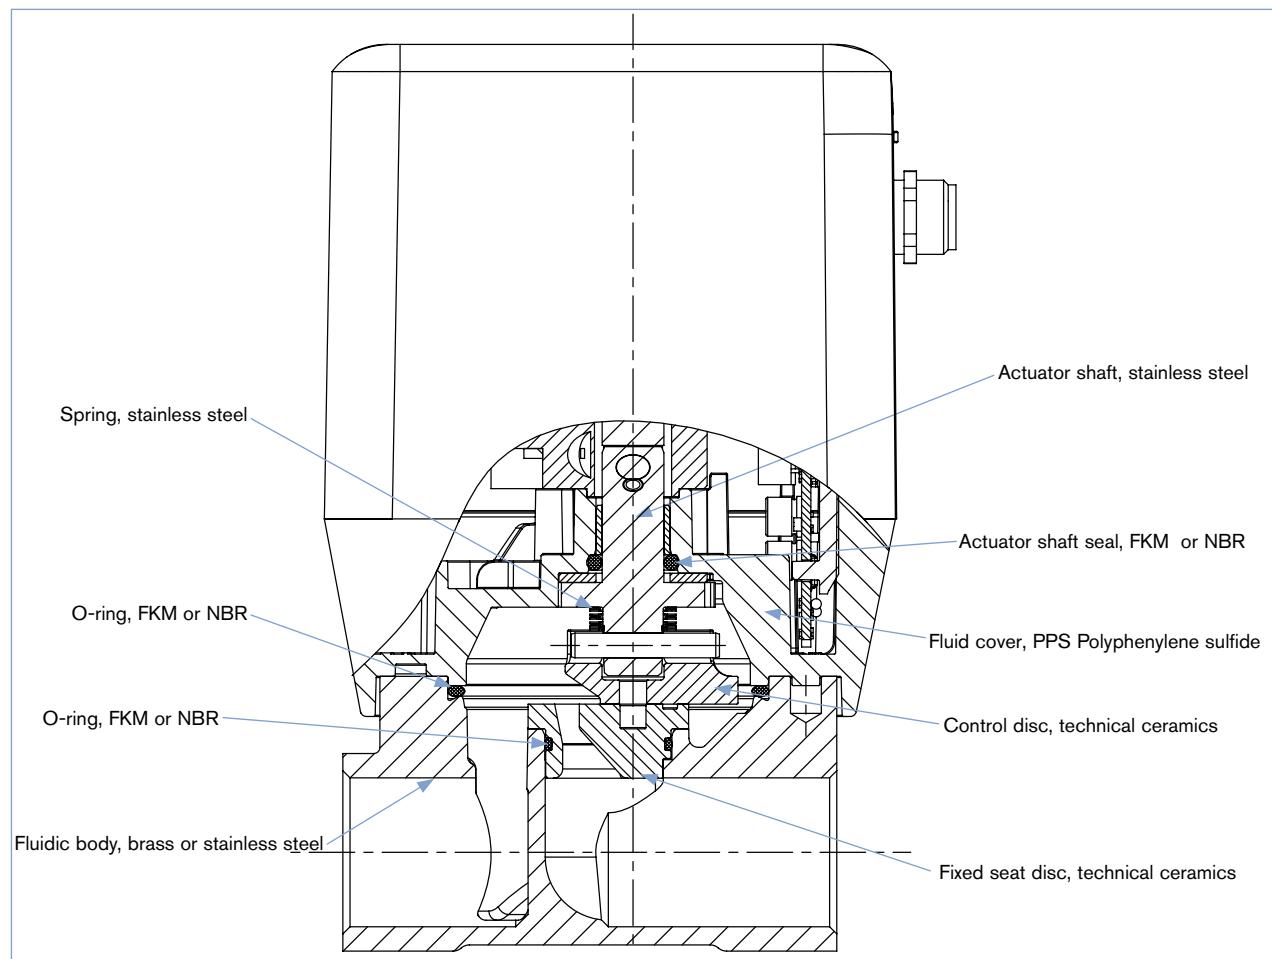

## Dimensions [mm]


## Standard version

Threaded port body MS version

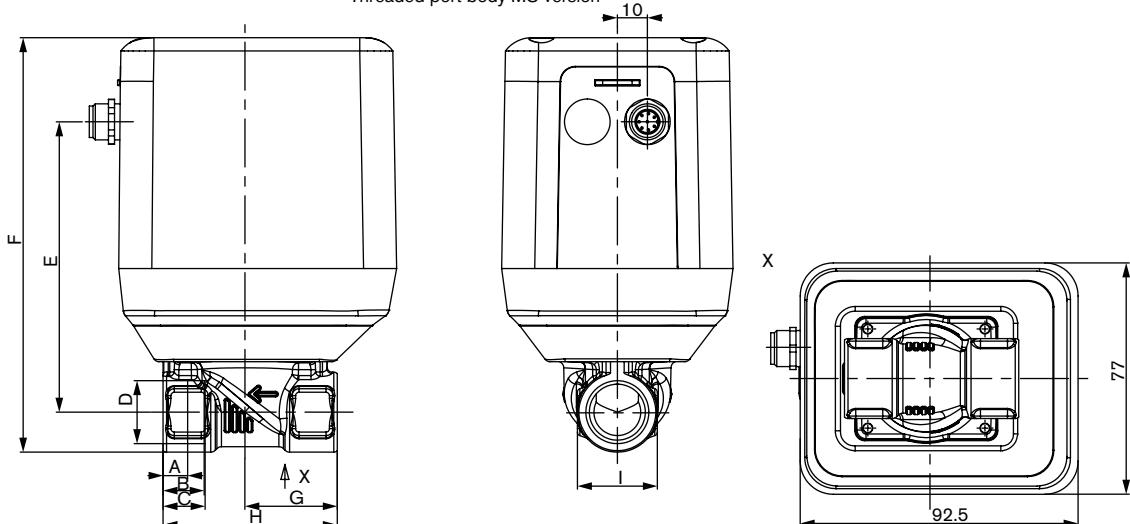

A	B	C	D	E	F	G	H	I
8.2	13.7	-	NPT 1/2	96.65	137.95	30.75	58	26.6
-	-	14	G 1/2	96.65	137.95	30.75	58	26.6
8.6	14	-	NPT 3/4	103.34	147.01	43	80	32
-	-	16	G 3/4	103.34	147.01	43	80	32
10.2	16.8	-	NPT 1	108.31	156.35	49	95	41
-	-	18	G 1	108.31	156.35	49	95	41

Threaded port body VA version

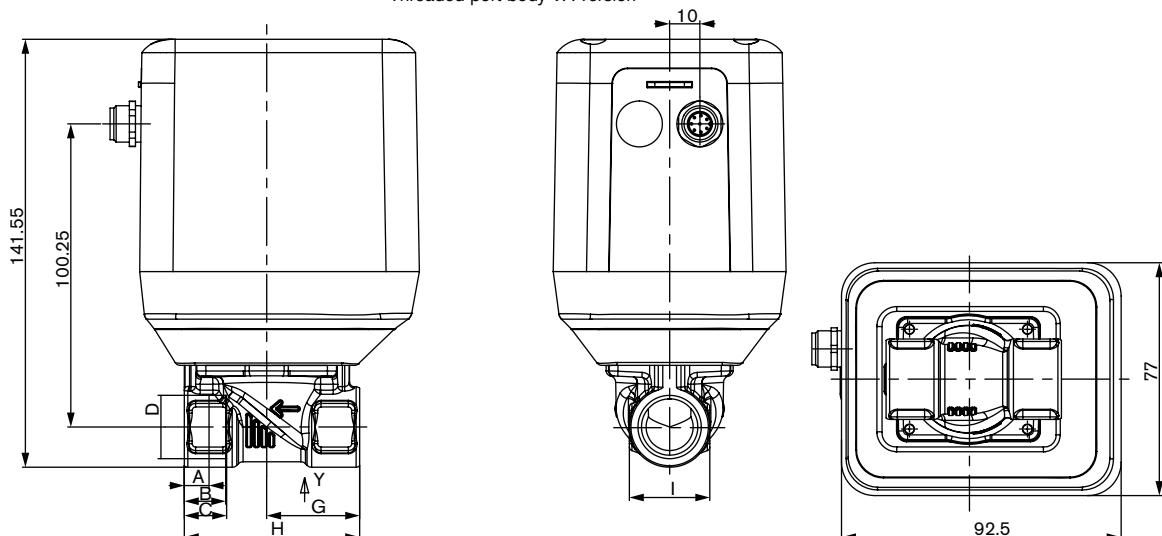

A	B	C	D	E	F	G	H	I
8.2	13.7	-	NPT 1/2	100.25	141.55	30.75	58	26.6
-	-	14	G 1/2	100.25	141.55	30.75	58	26.6
8.6	14	-	NPT 3/4	107.81	151.35	43	80	32
-	-	16	G 1/2	107.81	151.35	43	80	32
10.2	16.8	-	NPT 1	113.09	161.15	49	95	41
-	-	18	G 1	113.09	161.15	49	95	41

## Pin Assignment

		<b>Circular connector M12 - 8-pin</b>	<b>Pin</b>	<b>Assignment</b>
			1	24V DC
			2	GND
			3	Not connected
			4	Not connected
			5	Not connected
			6	Analogue input +
			7	Binary output
			8	Analogue input GND

## Ordering Chart

<b>Valve function</b>	<b>Orifice [mm]</b>	<b>Port connection</b>	<b>Seal material</b>	<b><math>k_{vs}</math> value water [m³/h]<sup>6)</sup></b>	<b>Nominal pressure<sup>7)</sup> [bar]</b>	<b>Item no. Brass</b>	<b>Item no. Stainless steel</b>
Shut-off valve, without safety position in case of power failure	8	G 1/2	FKM	1.8	6	269 164	269 177
			NBR	1.8	6	269 170	269 183
		NPT 1/2	FKM	1.8	6	269 189	269 202
			NBR	1.8	6	269 196	269 208
	10	G 1/2	FKM	2.5	6	269 165	269 178
			NBR	2.5	6	269 171	269 184
		NPT 1/2	FKM	2.5	6	269 190	269 203
			NBR	2.5	6	269 197	269 209
	12	G 3/4	FKM	3.9	6	269 166	269 179
			NBR	3.9	6	269 173	269 185
		NPT 3/4	FKM	3.9	6	269 191	269 204
			NBR	3.9	6	269 198	269 210
	15	G 3/4	FKM	6.0	6	269 167	269 180
			NBR	6.0	6	269 174	269 186
		NPT 3/4	FKM	6.0	6	269 192	269 205
			NBR	6.0	6	269 199	269 211
	20	G 1	FKM	8.8	6	269 168	269 181
			NBR	8.8	6	269 175	269 187
		NPT 1	FKM	8.8	6	269 193	269 206
			NBR	8.8	6	269 200	269 212
	25	G 1	FKM	12.3	6	On request	On request
			NBR	12.3	6	On request	On request
		NPT 1	FKM	12.3	6	On request	On request
			NBR	12.3	6	On request	On request

<sup>6)</sup> Measured with water (20°C) and 1 bar pressure drop over valve

<sup>7)</sup> Fuel gases may differ

## Ordering Chart for Accessories

<b>Article</b>	<b>Item No.</b>
M12 connector with 2m cable, 8 pins	919 061
M12 connector with 2m cable, 8 pins (shielded cable)	918 991

To find your nearest Bürkert facility, click on the orange box →

**По вопросам продаж и поддержки обращайтесь:**

Архангельск +7 (8182) 45-71-35	Калининград +7 (4012) 72-21-36	Новороссийск +7 (8617) 30-82-64	Сочи +7 (862) 279-22-65
Астана +7 (7172) 69-68-15	Калуга +7 (4842) 33-35-03	Новосибирск +7 (383) 235-95-48	Ставрополь +7 (8652) 57-76-63
Астрахань +7 (8512) 99-46-80	Кемерово +7 (3842) 21-56-70	Омск +7 (381) 299-16-70	Сургут +7 (3462) 77-96-35
Барнаул +7 (3852) 37-96-76	Киров +7 (8332) 20-58-70	Орел +7 (4862) 22-23-86	Сызрань +7 (8464) 33-50-64
Белгород +7 (4722) 20-58-80	Краснодар +7 (861) 238-86-59	Оренбург +7 (3532) 48-64-35	Сыктывкар +7 (8212) 28-83-02
Брянск +7 (4832) 32-17-25	Красноярск +7 (391) 989-82-67	Пенза +7 (8412) 23-52-98	Тверь +7 (4822) 39-50-56
Владивосток +7 (4232) 49-26-85	Курск +7 (4712) 23-80-45	Первоуральск +7 (3439) 26-01-18	Томск +7 (3822) 48-95-05
Владимир +7 (4922) 49-51-33	Липецк +7 (4742) 20-01-75	Пермь +7 (342) 233-81-65	Тула +7 (4872) 44-05-30
Волгоград +7 (8442) 45-94-42	Магнитогорск +7 (3519) 51-02-81	Ростов-на-Дону +7 (863) 309-14-65	Тюмень +7 (3452) 56-94-75
Воронеж +7 (4732) 12-26-70	Москва +7 (499) 404-24-72	Рязань +7 (4912) 77-61-95	Ульяновск +7 (8422) 42-51-95
Екатеринбург +7 (343) 302-14-75	Мурманск +7 (8152) 65-52-70	Самара +7 (846) 219-28-25	Уфа +7 (347) 258-82-65
Иваново +7 (4932) 70-02-95	Наб.Челны +7 (8552) 91-01-32	Санкт-Петербург +7 (812) 660-57-09	Хабаровск +7 (421) 292-95-69
Ижевск +7 (3412) 20-90-75	Ниж.Новгород +7 (831) 200-34-65	Саранск +7 (8342) 22-95-16	Чебоксары +7 (8352) 28-50-89
Иркутск +7 (3952) 56-24-09	Нижневартовск +7 (3466) 48-22-23	Саратов +7 (845) 239-86-35	Челябинск +7 (351) 277-89-65
Йошкар-Ола +7 (8362) 38-66-61	Нижнекамск +7 (8555) 24-47-85	Смоленск +7 (4812) 51-55-32	Череповец +7 (8202) 49-07-18
Казань +7 (843) 207-19-05			Ярославль +7 (4852) 67-02-35

**сайт: [burkert.pro-solution.ru](http://burkert.pro-solution.ru) | эл. почта: [btk@pro-solution.ru](mailto:btk@pro-solution.ru)  
телефон: 8 800 511 88 70**